

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 756 881 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

05.02.1997 Bulletin 1997/06

(51) Int Cl.<sup>6</sup> A62B 18/10; F16K 15/14

(21) Application number: 96305203.0

(22) Date of filing: 16.07.1996

(84) Designated Contracting States:

DE ES FR GR IE NL SE

(72) Inventor: Bowers, John Lawrence

Douglas, Isle of Man (GB)

(30) Priority: 04.08.1995 GB 9515986

(74) Representative: Obee, Robert William

Group Patents Department

Racal Group Services Limited

Richmond Court

309 Fleet Road

Fleet Hampshire GU13 8BU (GB)

(71) Applicant: RACAL HEALTH & SAFETY LIMITED  
Bracknell, Berkshire RG12 1RG (GB)

### (54) Uni-directional fluid valve

(57) A uni-directional fluid valve particularly for use as an exhalation valve for a filter mask comprises a flexible flap 7 attached at one end to a concave portion 9A of a seat. The mounting of the flap imparts to it a transverse curvature, stiffening the flap sufficiently for it to remain seated in the absence of a pressure differential across it even when orientated with the seat above the flap.

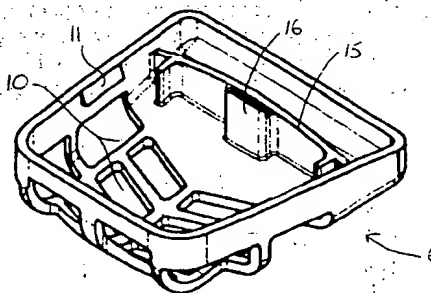

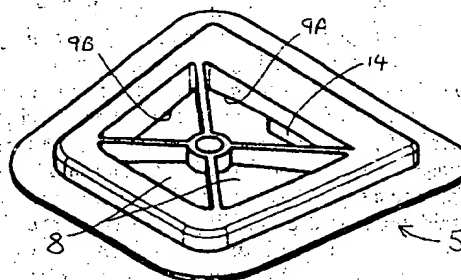


Fig. 2

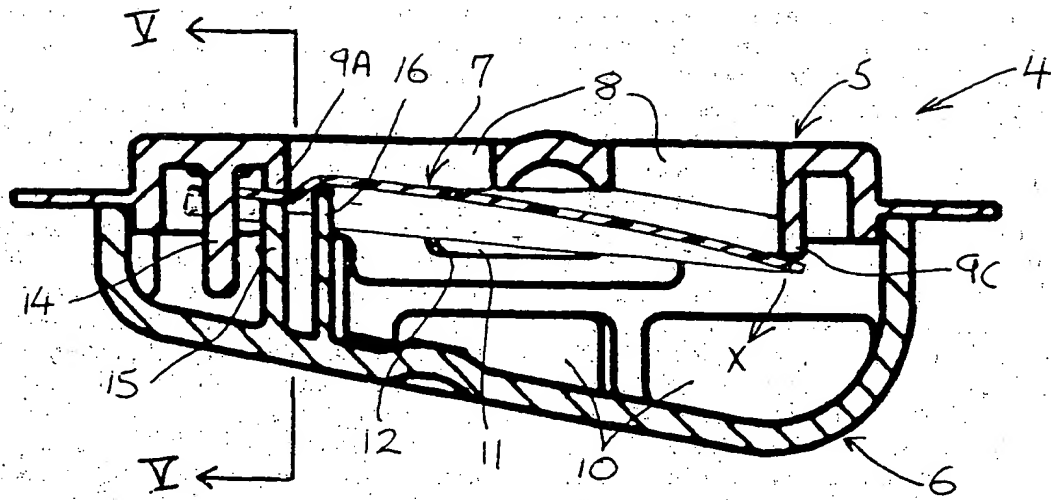


Fig. 4

## Description

The present invention relates to a uni-directional fluid valve which may in particular be used as an exhalation valve for a filter mask. By a "filter mask" we mean a device adapted to be worn over the nose and mouth of a user and made from or incorporating a filter material to remove one or more unwanted components from the inspired air. To improve the comfort and efficiency of such devices it is common to provide a uni-directional exhalation valve on the mask which opens under the pressure differential consequent upon exhalation of the user to allow for a relatively unrestricted flow of exhalate out of the mask, but which closes under other conditions. Examples of valved filter masks are shown in GB-2072516, DE-4029939, US-4414973, US-4630604, US-4838262, US-4873972, US-4934362, US-4958633, US-4974586, US-4981134 and US-5325892.

A common type of exhalation valve comprises a circular diaphragm of e.g. silicone rubber and a cooperating circular valve seat surrounding the orifice which passes the user's exhalate. The diaphragm is clamped at its centre and marginal portions flex away from the seat when the user exhales. In another known type the diaphragm is in the form of a flexible flap which is attached to a cooperating seat structure at one end, that is to say in cantilever fashion, and flexes away from the rest of the seat when the user exhales. In the design of an exhalation valve it is important to maximise the cross-sectional area of the open orifice to allow free flow of exhalate through the valve, and also to minimise the differential air pressure required to open the valve (i.e. the valve "cracking" pressure). Centrally clamped diaphragm valves require a greater force to open them than cantilevered flap type valves of equivalent size because their available "lever arm" is less. Furthermore, the structure of a cantilevered flap type valve, when open, generally presents less of an obstruction to flow than the centrally clamped circular diaphragm type valve, or in other words imposes a smaller pressure drop for a given orifice size. A potential problem which must be addressed in the design of a cantilevered flap valve, however, lies in ensuring that the flap will remain closed in all orientations of the structure while it is not subject to an exhalatory pressure differential. That is to say, while in order to minimise the opening pressure differential of the valve it is desirable to employ a highly flexible flap of minimal thickness, the very flexibility of the flap may mean that if the valve is inverted in use (i.e. orientated with the seat lying above the flap), the flap may droop down from the seat when the user is not exhaling. This is clearly undesirable as it may open a leakage path into the mask for the contaminants which it is intended to exclude.

US-5325892 discloses an exhalation valve with a cantilevered flap in which the valve seat has a seal ridge which is curved in the longitudinal direction of the flap, the curvature corresponding to a deformation curve ex-

hibited by the flap when it bends under its own weight (with no pressure differential). In other words the design of that valve recognises that the flap is unable to stay flat when the structure is inverted and matches the configuration of the seat to the curvature of the flap under that condition.

In accordance with the present invention a uni-directional fluid valve comprises a flexible flap and a cooperating valve seat surrounding an orifice adapted to pass a fluid; the flap being attached to the seat at one end, in cantilever fashion; and being adapted to flex away from other portions of the seat when fluid flows in the permitted direction; and wherein there is a transverse curvature to at least the said one end of the flap whereby to maintain the flap substantially seated in the absence of a pressure differential across it, in any orientation of the valve.

The effect of the transverse curvature of the flap in a valve according to the invention is therefore to stiffen the flap sufficiently to resist any drooping away from the seat when there is no applied pressure differential, even in the inverted orientation of the structure. As soon as the flap is "cracked" by an appropriate pressure differential, however, the free end of the flap will rapidly flex away from the seat and this flexure will progress along the length of the flap to a position determined by the instantaneous rate of fluid flow. At least the root end of the flap, at its position of attachment to the seat, will retain its transverse curvature however, and this will apply a restorative force to the flexed flap, assisting to reseat the flap when the permitted flow of fluid ceases. The stiffening effect of this transverse curvature is therefore to be distinguished from the longitudinal curvature of the flap in US-5325892.

The flap for a valve according to the invention may be manufactured to exhibit the requisite transverse curvature in its natural state, e.g. by means of injection moulding or thermoforming. In the preferred embodiment to be described hereinafter, however, the flap as manufactured is flat and its curvature is imparted in use by means of the shaping of the valve structure in which it is mounted.

The invention will now be more particularly described, by way of example, with reference to the accompanying schematic drawings, in which:-

Figure 1 is a perspective view of a filter mask incorporating a uni-directional valve in accordance with the invention as an exhalation valve;

Figure 2 is an "exploded" isometric view of the components of a preferred embodiment of the exhalation valve for the mask of Figure 1;

Figure 3 is an isometric view showing the interior of the upper housing member of Figure 2;

Figure 4 is a longitudinal section through the valve

assembled from the components of Figure 2, on the line IV-IV of Figure 5, in the closed condition; and

Figure 5 is a section on the line V-V of Figure 4.

Referring to Figure 1, the illustrated mask 1 is made from one or more layers of flexible sheet filter material cut from a blank, folded and welded to form a cup-shaped structure to be worn over the nose and mouth of the user. It is in particular shaped in accordance with the invention in GB-2046102, to which reference is directed for a fuller description of the method of forming the mask from a flat blank. In use the peripheral edge of the mask forms a seal against the wearer's face and it is held in place by elastic headbands 2 and a deformable wire nose clip 3 as well known in the art.

At a suitable location in the side wall of the mask 1 an aperture is formed in which an exhalation valve 4 is fitted, the structure of which is more clearly illustrated in Figures 2 to 5.

The illustrated valve 4 comprises two interfitting moulded plastics housing members 5 and 6, and an elastomeric flap 7 which in the assembled valve is trapped at one end between the housing members. The upper housing member 5 as viewed in Figure 2 is also seen from its opposite face in Figure 3. It has inlet ports 8 passing through it which on the downstream side are surrounded by a seal ridge 9A/9B/9C of generally trapezoidal planform. The lower housing member 6 as viewed in Figure 2 is of dished form with a series of outlet ports 10, and snaps onto the member 5 by means of a pair of integral lateral lugs 11 engaging in slots 12 formed in member 5. The flap 7 is of generally trapezoidal planform sized to fit over the seal ridge and is formed from a thin and highly flexible piece of elastomer, e.g. 0.5mm thick latex natural rubber having a Shore micro hardness of about 30.

The flap 7 is positioned in the valve by a notch 13 at one end embracing a block 14 on housing member 5, and when the housing members are snapped together that end of the flap becomes trapped between the adjacent portion 9A of the seal ridge and a profiled block 15 upstanding from housing member 6. That is to say it is mounted in the valve in cantilever fashion. In its natural state, if the flap 7 is held horizontally at one end it will tend to bow longitudinally under the force of gravity, i.e. so that its opposite end droops down considerably from the plane of its fixed end. Both the block 15 and the facing portion 9A of seal ridge are, however, curved so as to impart to the flap a transversely arched configuration in the assembled valve, as seen particularly in Figures 4 and 5. In the illustrated embodiment this arching is accentuated for the central part of the flap by means of a second profiled block 16 upstanding from the housing member 6 in front of and to a slightly greater height than the block 15, although this is not essential in all embodiments of the invention. The arching of the flap stiffens it sufficiently to prevent it drooping away

from any part of the seal ridge under zero pressure differential conditions, whatever the orientation of the valve. The preferred orientation of the valve is in fact with the outlet ports 10 directed with a downward component, as indicated in Figure 1, so that the user's exhalate will not mist any associated eyewear, and if the user lowers his head the valve may become oriented with the flap 7 lying wholly below the housing member 5.

In use, therefore, the flap 7 seats upon the seal ridge to prevent the passage of any air into the mask through the valve 4 while the user is not exhaling. At the commencement of exhalation, as soon as a minimum "cracking" pressure differential is applied to the flap 7 from the interior of the mask the free end of the flap will lift away from the seal ridge in the sense of the arrow X in Figure 4, and flexure of the flap will progress rapidly along its length towards the fixed (root) end, to a position determined by the instantaneous rate of flow of exhalate out through ports 8 and 10. When exhalation ceases, the restorative effect of the arched mounting of the flap will cause the flap as a whole rapidly to reseat upon the seal ridge, to minimise the risk of any inward leakage of contaminant through the valve in the period between the end of exhalation and the commencement of inhalation. In particular, the flap 7 does not depend for its closure upon the subsequent application of an inhalatory pressure differential.

From Figure 3 it will be seen that while the portion 9A of the seal ridge at the root end of the flap has a concave curvature the remainder 9B/9C of the ridge has a flat surface. From Figures 3 and 4 it will also be seen that the portion 9C of the seal ridge at the free end of the flap rises further from the plane of the member 5 than does the root end portion 9A, and the two side portions 9B are straight but inclined as viewed in elevation. The combined effect of this configuration is that the transverse curvature of the flap 7 decreases towards its free end, which lies flat against seal ridge portion 9C, while a degree of longitudinal curvature is also imparted to the central section of the flap (but not to its side edges which lie flat against the ridge portions 9B). This has been found to enhance the stability of the flap in its closed condition while minimising the opening pressure differential for the particular embodiment illustrated. In other embodiments, however, there may be no longitudinal curvature of the flap and/or its transverse curvature may extend throughout its whole length, in the latter case the seal ridge portion 9C being modified to a concave form as indicated in broken line in Figure 3.

#### Claims

1. A uni-directional fluid valve (4) comprising a flexible flap (7) and a cooperating valve seat (9A,9B,9C) surrounding an orifice (8) adapted to pass a fluid; the flap (7) being attached to the seat (9A) at one end, in cantilever fashion, and being adapted to flex

away from other portions of the seat (9C,9B) when fluid flows in the permitted direction; characterised in that there is a transverse curvature to at least the said one end of the flap (7) whereby to maintain the flap (7) substantially seated in the absence of a pressure differential across it, in any orientation of the valve (4).

2. A valve according to claim 1 wherein the flap exhibits said curvature in its natural state.
3. A valve (4) according to claim 1 wherein said curvature is imparted to the flap (7) by virtue of its mounting in the valve structure (5,6).
4. A valve (4) according to claim 3 wherein the flap (7) is trapped at said one end between confronting respectively concave (9A) and convex (15) surfaces of first (5) and second (6) structural members, said concave surface comprising part of said seat (9A).
5. A valve (4) according to claim 4 wherein said second structural member (6) presents a further surface (16) in contact with a central portion of said one end of the flap (7) to accentuate the curvature thereof.
6. A valve (4) according to any preceding claim wherein that part of the seat (9C) which the free end of the flap (7) is adapted to contact is flat.
7. A valve (4) according to any one of claims 1 to 5 wherein that part of the seat (9C) which the free end of the flap (7) is adapted to contact is of concave curvature.
8. A valve (4) according to any preceding claim wherein in those parts of the seat (9B) which the side edges of the flap (7) are adapted to contact are flat.
9. A valve (4) according to any preceding claim wherein in the mounting of the flap (7) in the valve structure (5,6) imparts a longitudinal curvature to the central section of the flap (7) but not to its side edges.
10. A filter mask (1) having an exhalation valve (4) constructed in accordance with any preceding claim.
11. A mask (1) according to claim 11 wherein the exhalation valve (4) is so located that during normal head movements of a wearer the flap (7) will lie below the seat (9A,9B,9C).







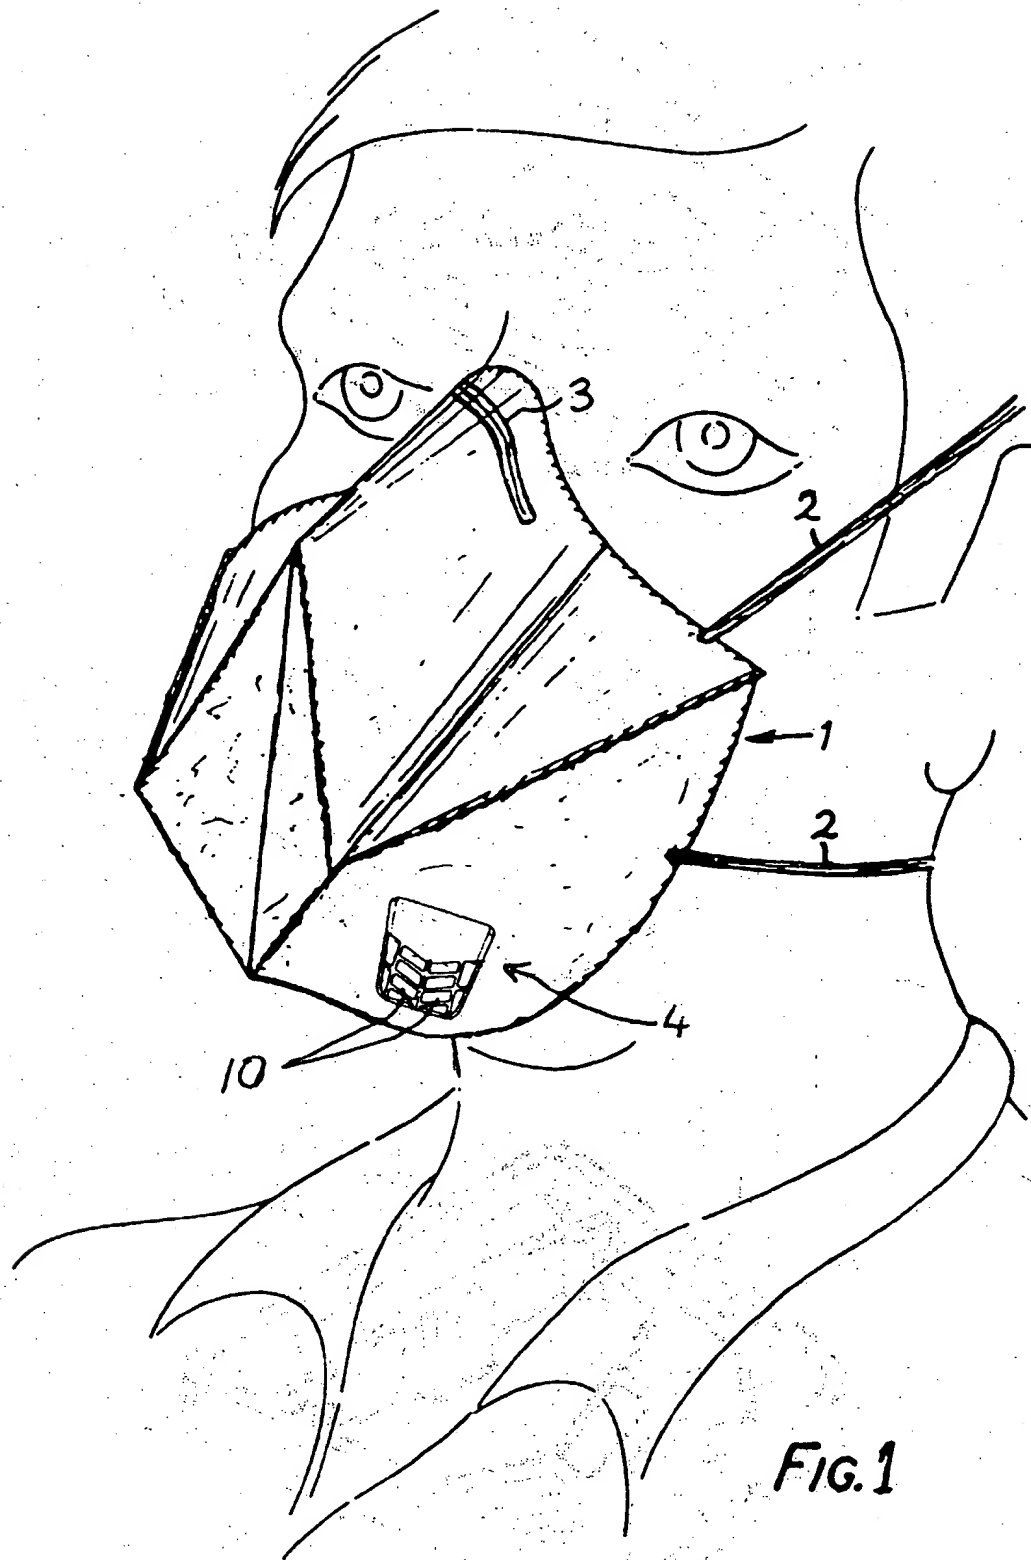


FIG.1

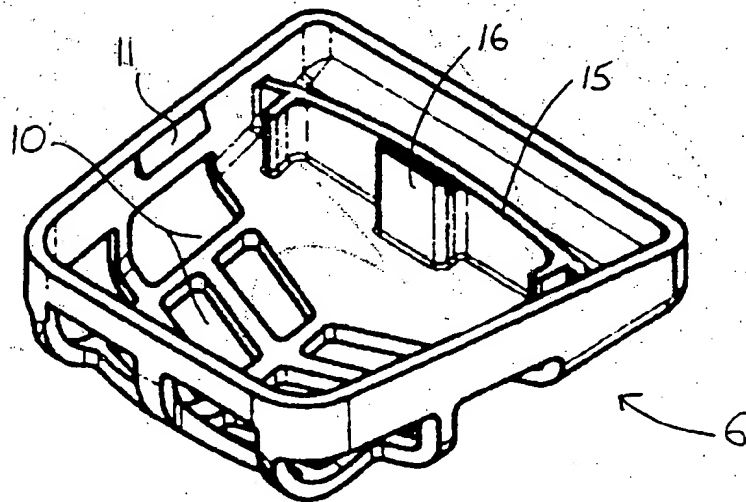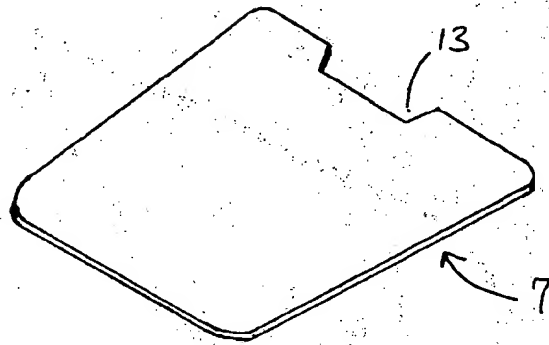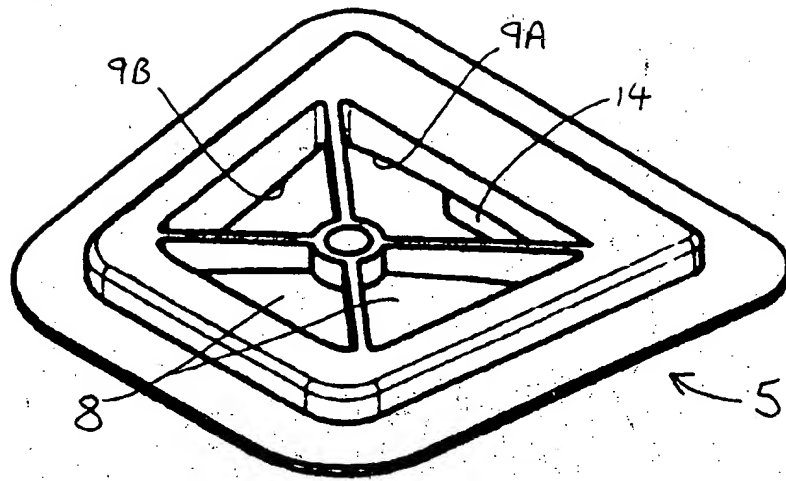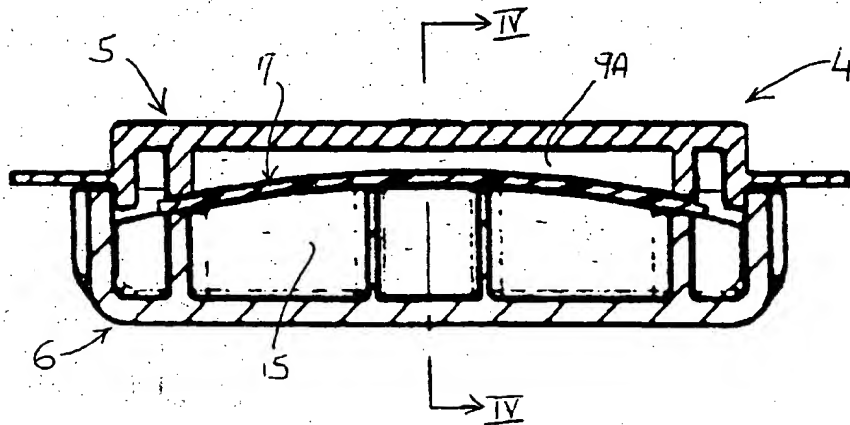

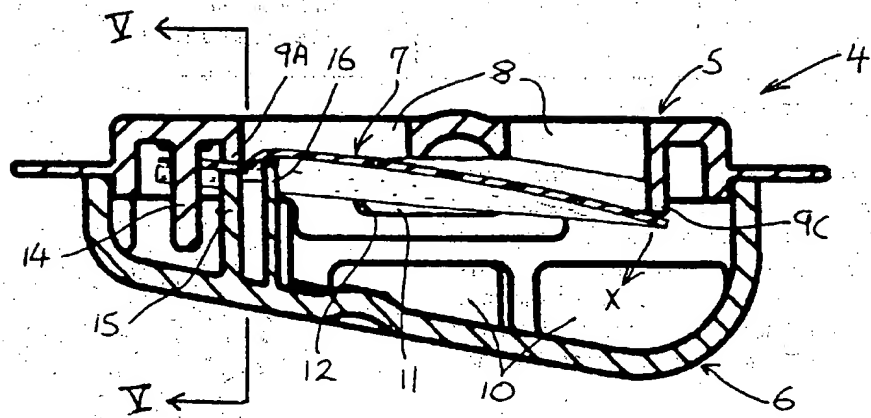

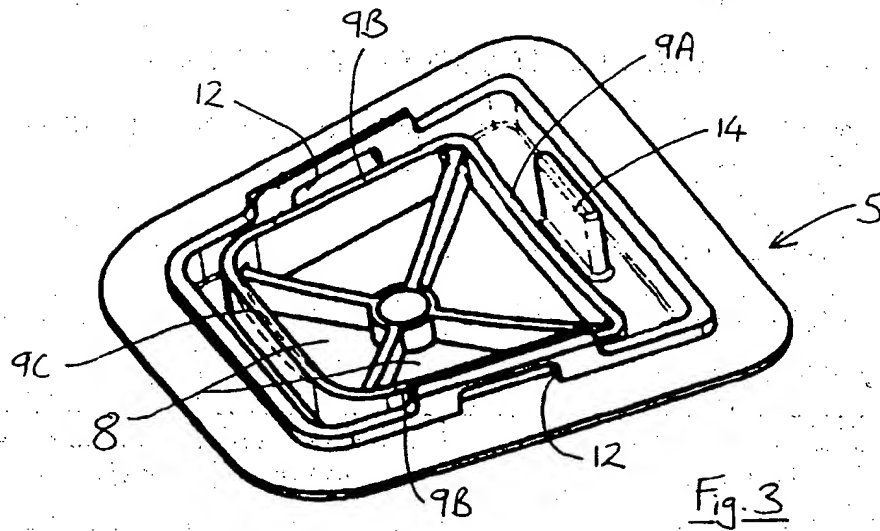

(19)



Europäisch s Patentamt

European Patent Office

Office européen d s brev ts



(11)

EP 0 756 881 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
11.03.1998 Bulletin 1998/11

(51) Int Cl.<sup>6</sup>: A62B 18/10, F16K 15/14

(43) Date of publication A2:  
05.02.1997 Bulletin 1997/06

(21) Application number: 96305203.0

(22) Date of filing: 16.07.1996

(84) Designated Contracting States  
DE ES FR GR IE NL SE

(30) Priority: 04.08.1995 GB 9515986

(71) Applicant: RACAL HEALTH & SAFETY LIMITED  
Bracknell, Berkshire RG12 1RG (GB)

(72) Inventor: Bowers, John Lawrence  
Douglas, Isle of Man (GB)

(74) Representative: Obee, Robert William  
Group Patents Department  
Racal Group Services Limited  
Richmond Court  
309 Fleet Road  
Fleet Hampshire GU13 8BU (GB)

### (54) Uni-directional fluid valve

(57) A uni-directional fluid valve particularly for use as an exhalation valve for a filter mask comprises a flexible flap 7 attached at one end to a concave portion 9A of a seat. The mounting of the flap imparts to it a transverse curvature, stiffening the flap sufficiently for it to remain seated in the absence of a pressure differential across it even when orientated with the seat above the flap.

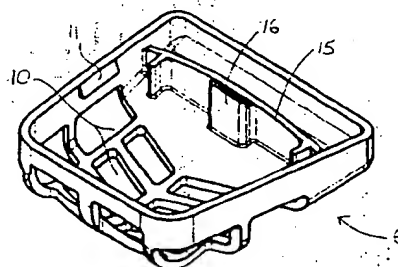

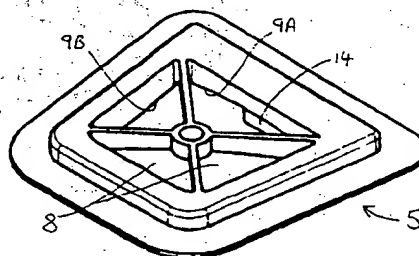


Fig. 2

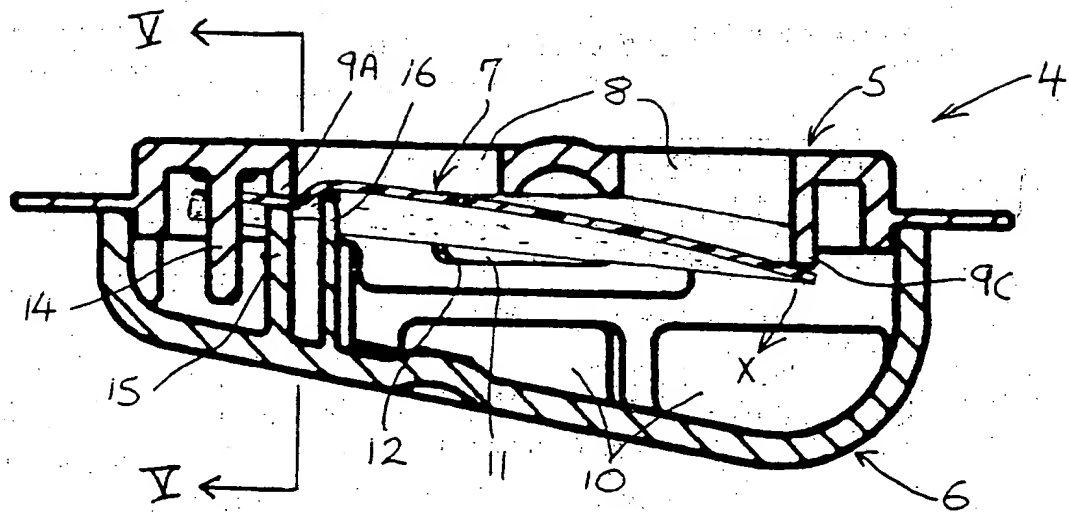


Fig. 4



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 5203

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A,D	WO 93 24181 A (MINNESOTA MINING AND MANUFACTURING COMPANY) * page 6, line 3 - page 21, line 27; figures *	1	A62B18/10 F16K15/14
A,D	EP 0 284 353 A (MINNESOTA MINING AND MANUFACTURING COMPANY) * page 3, line 57 - page 6, column 8, line - *	1	
A	EP 0 252 890 A (HORDA GUMMIFABRIK AB) * page 3, line 13 - page 6, line 3; figures *	1	
A	FR 791 607 A (DEGEA AG) * the whole document *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A62B F16K
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		16 January 1998	Triantaphillou, P
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technical background  O : non-written disclosure  = : intermediate document</p>			
<p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after, the filing date  D : document cited in the application  - : document cited for other reasons  A : member of the same patent family, corresponding document</p>			